

# Mobile Diesel Generators



**GENERAC®**  
**MAGNUM**



The background of the advertisement is a silhouette of a construction site at sunset. Several large tower cranes are visible, their long jibs extending across the sky. In the foreground, the silhouettes of workers and the skeletal structure of a building under construction are visible against the warm, orange glow of the setting sun. The overall mood is industrial and active.

Power **anywhere.**

- Road & Industrial Construction
- Disaster Relief
- Security & Government
- Entertainment & Events
- Specialized Applications

**GENERAC**<sup>®</sup>  
MAGNUM



## We're bringing more to our customers

Together, Generac I Magnum bring more to our customers. Best-in-class mobile generators, light towers, heaters and pumps: reliable, durable equipment needed to get the job done.

Our goal is to help our customers optimize their operation with the power and equipment that enables safe worksites and streamlines workflow to improve productivity and profitability.

Uptime is critical for our customers. In addition to the durability and reliability designed into our products, we offer outstanding customer service and support that won't let you down. Our global support team is there where and when you need us.

With quality products and innovative technologies that maximize fuel efficiency and minimize maintenance and repairs, Generac I Magnum provides ultimate value and return on your investment.







## Lite 8kW – 19kW

Don't let the size fool you, these generators might be small, but they are built to perform in the most rugged environments and bring up to 19kW to power tools and equipment on the job site.

### Tough

- Steel, lockable enclosure
- Full tubular steel frame
- Durable powder coat finish
- Stainless steel exterior hardware

### Easy to Use

- Self-priming engines
- External convenience outlets with MLG15, MLG20
- Individual breakers
- External emergency stop switch

### Reliable

- Key switch on single phase models
- Low oil/high temp shutdowns
- Start limit main breaker (single phase only)
- Up to 48 hours full load run time
- Voltage regulation within +/- 1%
- 2 year 2,000 hour warranty

### Options

- 720 CCA Gel Cell Battery
- Liquid Containment – Quiet Pack
- Battery Disconnect
- Battery Charger
- Central Lift Point
- Configured Outlet Panel
- Outrigger Package
- Skid-Mounted
- Combo Hitch – 2.5" Ring / 2" Ball
- Pintle Ring Hitch 2.5" or 3" Ring

### Cold Zone Packages

Our optional cold weather package outfits your generator for optimum performance in cold conditions.

#### Cold Zone Package

*Rated to -10 F (-23 C)*

- Liquid Containment
- Engine Heater
- 60/40 Coolant
- Heated Fuel Filter





# Standard 21kVA – 688kVA



## Tough

- Aluminum, lockable enclosure
- Steel skid frame and trailer
- Durable industrial powder coat finish
- Stainless steel exterior hardware

## Easy to Use

- Power Zone Controller
- Voltage selector switch
- Lugs and lug box safety switch
- Multiple convenience outlets
- External emergency stop switch
- External, lockable fuel cap
- Automatic remote start
- Detachable generator-set and trailer
- Fuel tank integrated into generator-set
- Interior Cabinet Light
- Control Panel Light

## Reliable

- Advanced microprocessor
- Voltage regulation within +/- 0.5%
- Models with full load run times in excess of 24 hours
- Air filter condition indicator
- Low coolant shutdown
- 2 year 2,000 hour warranty

## Options

- SUPERSTART Generator
- Gel Cell Battery
- Battery Disconnect
- Battery Charger
- Buck Transformer Kit
- 4 Position Phase Switch
- Cam Locks
- Double Wall Fuel Tank
- Extended Run Fuel Tank
- Liquid Containment
- Hitch – 2 5/16" Ball or 3" Ring
- Brakes – Electric
- Tandem Axle Trailers

## Cold Zone Packages

Our optional cold weather packages outfit your generator for optimum performance in extreme-cold conditions.


### Cold Zone Package Rated to -10 F (-23 C)

- Liquid Containment
- Engine Heater
- 60/40 Coolant
- Heated Fuel Filter

### Arctic Zone Package Rated to -40 F (-40 C)

- Liquid Containment
- Engine Heater
- 60/40 Coolant
- Clutch Fan
- Heated Fuel Filter
- Heater OVR System

## Power Zone™

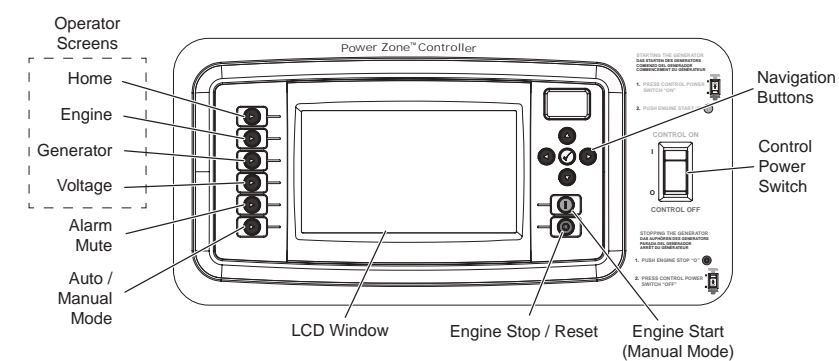



# Containerized 675kVA – 2250kVA

## Tough

- Industrial diesel liquid-cooled genset
- EPA emissions compliant engine for clean and trouble-free commissioning
- Turbocharged and intercooled engine with unit mounted radiator
- Louvered air intake with debris screen to prevent dirt and debris from entering genset
- Heavy duty construction that's designed for use in prime or standby power applications

## Easy to Use

- Large integral fuel tank designed for easy filling and long operation
- Fully featured microprocessor-based controller that's easy to use and field programmable for custom installations
- Generator sets are production tested to ensure easy startup
- 2 year 2,000 hour warranty

|                                | MCG600M2  | MCG800M2   | MCG1000M2   | MCG1250M2   | MCG1600M2   | MCG2000M2   |
|--------------------------------|-----------|------------|-------------|-------------|-------------|-------------|
| Voltage Option (L-L / L-N)     | 480 / 277 | 480 / 277  | 480 / 277   | 480 / 277   | 480 / 277   | 480 / 277   |
| Max. Standby Rating (kW / kVA) | 600 / 750 | 800 / 1000 | 1000 / 1250 | 1250 / 1563 | 1600 / 2000 | 2000 / 2500 |
| Max. Prime Rating (kW / kVA)   | 540 / 675 | 720 / 900  | 900 / 1125  | 1125 / 1406 | 1440 / 1800 | 1800 / 2250 |
| Output (Phase / Hertz)         | 3 / 60    | 3 / 60     | 3 / 60      | 3 / 60      | 3 / 60      | 3 / 60      |

Specifications and designs are subject to change.



# Specifications

## Lite

|                                      | MLG8K                              | MLG15M                             | MLG20IF4                           |
|--------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| <b>Output</b>                        |                                    |                                    |                                    |
| 3 Phase - Standby (kW/kVA)           | N/A                                | N/A                                | N/A                                |
| Amps (480/208 V)                     | N/A                                | N/A                                | N/A                                |
| 3 Phase - Prime (kW/kVA)             | N/A                                | N/A                                | N/A                                |
| Amps (480/208 V)                     | N/A                                | N/A                                | N/A                                |
| 1 Phase - Standby (kW/kVA)           | 9 / 9                              | 14 / 14                            | 20 / 20                            |
| Amps (240V)                          | 37                                 | 58                                 | 83                                 |
| 1 Phase - Prime (kW/kVA)             | 8.1 / 8.1                          | 13 / 13                            | 19 / 19                            |
| Amps                                 | 33                                 | 54                                 | 79                                 |
| AC Voltage 1-phase                   |                                    | 120, 240                           |                                    |
| AC Voltage 3-phase                   |                                    | N/A                                |                                    |
| Frequency Hz                         |                                    | 60                                 |                                    |
| Power Factor                         |                                    | 1.0 (1Ø)                           |                                    |
| Generator (Brand/Type/Insulation)    |                                    | Marathon/Brushless/F               |                                    |
| Sound (dB(A) 23 Feet @ prime)        | 70                                 | 68                                 | 70                                 |
| CSA Listed                           | Yes                                | Yes                                | Yes                                |
| <b>Size and Weight</b>               |                                    |                                    |                                    |
| Skid Mounted ( l x w x h ) in (m)    | N/A                                | N/A                                | N/A                                |
| Dry Weight lb (kg)                   | N/A                                | N/A                                | N/A                                |
| Operating Weight lb (kg)             | N/A                                | N/A                                | N/A                                |
| Trailer Mounted ( l x w x h ) in (m) | 105 x 68 x 56 (2.67 x 1.73 x 1.42) | 105 x 68 x 56 (2.67 x 1.73 x 1.42) | 105 x 68 x 56 (2.67 x 1.73 x 1.42) |
| Dry Weight lb (kg)                   | 1030 (467)                         | 1425 (646)                         | 1471 (667)                         |
| Operating Weight lb (kg)             | 1250 (567)                         | 1823 (827)                         | 1761 (799)                         |
| <b>Engine</b>                        |                                    |                                    |                                    |
| Brand                                | Kubota                             | Mitsubishi                         | Isuzu                              |
| Model #                              | D1105-E3BG                         | S4L2-W461ML                        | 4LE2TAGV-03                        |
| Aspiration                           | Natural                            | Natural                            | Turbo                              |
| HP (prime @ 1800rpm) (kW)            | 13.5 (10.1)                        | 22.3 (16.6)                        | 36.2 (27.0)                        |
| Displacement in3 (L)                 | 68.53 (1.12)                       | 107 (1.8)                          | 133 (2.18)                         |
| Cylinders                            | 3                                  | 4                                  | 4                                  |
| Speed (rpm)                          | 1800                               | 1800                               | 1800                               |
| Fuel Consumed prime gph (Lph)        | 0.70 (2.65)                        | 1.3 (4.92)                         | 2.1 (7.8)                          |
| Battery (12 volt)                    | 1-12V/440 CCA                      | 1-12V/440 CCA                      | 1-12V/720 CCA                      |
| <b>Capacities</b>                    |                                    |                                    |                                    |
| Fuel Tank gal (L)                    | 56 (212)                           | 56 (212)                           | 50 (190)                           |
| Approximate Run Time hrs             | 43                                 | 43                                 | 24                                 |
| <b>AC Distribution</b>               |                                    |                                    |                                    |
| Main Breaker                         | 40                                 | 70                                 | 100                                |
| Voltage Selection                    | N/A                                | N/A                                | N/A                                |
| Voltage Regulation                   | +/-1%                              | +/-1%                              | +/-1%                              |
| 120V - 20 amp GFCI Duplex            | 2                                  | 2                                  | 2                                  |
| 240V - 30 amp Twist Lock             | 1                                  | 2                                  | 2                                  |
| 240V - 50 amp Twist Lock             | —                                  | 2                                  | 2                                  |
| <b>Trailer</b>                       |                                    |                                    |                                    |
| # of Axles & Capacity lbs (kg)       | 1-2200 (998)                       | 1 - 2200 (998)                     | 1 - 2200 (998)                     |
| Tire Size (in)                       | 13                                 | 15                                 | 15                                 |
| Brakes                               | N/A                                | N/A                                | N/A                                |
| Hitch – Standard                     | 2" Ball                            | 2" Ball                            | 2" Ball                            |

Specifications and designs are subject to change.

## Standard

|                                      | MMG25IF4                           | MMG35DF4                           | MMG45IF4                           | MMG55DF4                           |
|--------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| <b>Output</b>                        |                                    |                                    |                                    |                                    |
| 3 Phase - Standby (kW/kVA)           | 23 / 29                            | 31 / 39                            | 40 / 50                            | 40 / 60                            |
| Amps (480/208 V)                     | 35 / 81                            | 47 / 108                           | 60 / 139                           | 72 / 167                           |
| 3 Phase - Prime (kW/kVA)             | 21 / 26                            | 29 / 36                            | 36 / 45                            | 44 / 55                            |
| Amps (480/208 V)                     | 31 / 72                            | 43 / 100                           | 54 / 125                           | 66 / 153                           |
| 1 Phase - Standby (kW/kVA)           | 22 / 22                            | 30 / 30                            | 33 / 33                            | 46 / 46                            |
| Amps (240V)                          | 92                                 | 125                                | 138                                | 192                                |
| 1 Phase - Prime (kW/kVA)             | 20 / 20                            | 27 / 27                            | 30 / 30                            | 42 / 42                            |
| Amps                                 | 83                                 | 113                                | 125                                | 175                                |
| AC Voltage 1-phase                   |                                    | 120, 139, 208, 220, 240, 277       |                                    |                                    |
| AC Voltage 3-phase                   |                                    | 208, 220, 440, 480                 |                                    |                                    |
| Frequency Hz                         |                                    | 60                                 |                                    |                                    |
| Power Factor                         |                                    | 1 (1Ø), 0.8 (3Ø)                   |                                    |                                    |
| Generator (Brand/Type/Insulation)    |                                    | Marathon/Brushless/H               |                                    |                                    |
| Sound (dB(A) 23 Feet @ prime)        | 66                                 | 65                                 | 66                                 | 65                                 |
| CSA Listed                           | Yes                                | Yes                                | Yes                                | Yes                                |
| <b>Size and Weight</b>               |                                    |                                    |                                    |                                    |
| Skid Mounted ( l x w x h ) in (m)    | 95 x 39 x 65 (2.41 x 0.99 x 1.65)  | 95 x 39 x 65 (2.41 x 0.99 x 1.65)  | 95 x 39 x 65 (2.41 x 0.99 x 1.65)  | 95 x 39 x 65 (2.41 x 0.99 x 1.65)  |
| Dry Weight lb (kg)                   | 2430 (1102)                        | 3125 (1418)                        | 2843 (1290)                        | 3305 (1499)                        |
| Operating Weight lb (kg)             | 3160 (1433)                        | 4860 (1751)                        | 3580 (1624)                        | 4040 (1833)                        |
| Trailer Mounted ( l x w x h ) in (m) | 152 x 58 x 83 (3.81 x 1.45 x 2.11) | 152 x 58 x 83 (3.81 x 1.45 x 2.11) | 152 x 58 x 83 (3.81 x 1.45 x 2.11) | 152 x 58 x 83 (3.81 x 1.45 x 2.11) |
| Dry Weight lb (kg)                   | 2950 (1338)                        | 3725 (1690)                        | 3363 (1525)                        | 3905 (1771)                        |
| Operating Weight lb (kg)             | 3680 (1669)                        | 4460 (2023)                        | 4100 (1860)                        | 4040 (1833)                        |
| <b>Engine</b>                        |                                    |                                    |                                    |                                    |
| Brand                                | Isuzu                              | John Deere                         | Isuzu                              | John Deere                         |
| Model #                              | 4LE2TAGV-03                        | 3029HFG03                          | 4LE2XAGV01                         | 3029HFG03                          |
| Aspiration                           | Turbo                              | Turbo                              | Turbo                              | Turbo                              |
| HP (prime @ 1800rpm) (kW)            | 36.2 (27.0)                        | 44 (33)                            | 57 (42.8)                          | 67 (50)                            |
| Displacement in3 (L)                 | 133 (2.18)                         | 177 (2.9)                          | 134 (2.2)                          | 177 (2.9)                          |
| Cylinders                            | 4                                  | 3                                  | 4                                  | 3                                  |
| Speed (rpm)                          | 1800                               | 1800                               | 1800                               | 1800                               |
| Fuel Consumed prime gph (Lph)        | 2.1 (7.8)                          | 3.9 (14.8)                         | 3.3 (12.5)                         | 3.99 (14.8)                        |
| Battery (12 volt)                    | 1 - 12V/720 CCA                    | 1 - 12V/720 CCA                    | 1 - 12V/720 CCA                    | 1-12V/720 CCA                      |
| <b>Capacities</b>                    |                                    |                                    |                                    |                                    |
| Fuel Tank gal (L)                    | 100 (379)                          | 100 (379)                          | 100 (379)                          | 100 (379)                          |
| Approximate Run Time hrs             | 42.9                               | 31                                 | 27                                 | 24                                 |
| <b>AC Distribution</b>               |                                    |                                    |                                    |                                    |
| Main Breaker                         | 125                                | 125                                | 225                                | 125                                |
| Voltage Selection                    |                                    | 3 Position Switch (Lockable)       |                                    |                                    |
| Voltage Regulation                   | +/- 0.5%                           | +/- .05%                           | +/- 0.5%                           | +/- 0.5%                           |
| 120V - 20 amp GFCI Duplex            | 2                                  | 2                                  | 2                                  | 2                                  |
| 240V - 30 amp Twist Lock             | N/A                                | N/A                                | N/A                                | N/A                                |
| 240V - 50 amp Twist Lock             | 3                                  | 2                                  | 3                                  | 3                                  |
| <b>Trailer</b>                       |                                    |                                    |                                    |                                    |
| # of Axles & Capacity lbs (kg)       | 1 - 5000 (2268)                    | 1-5000 (2268)                      | 1 - 5000 (2268)                    | 1-5000 (2268)                      |
| Tire Size (in)                       | 15                                 | 15                                 | 15                                 | 15                                 |
| Brakes                               | Surge                              | Surge                              | Surge                              | Surge                              |
| Hitch – Standard                     | 2" Ball                            | 2 " Ball                           | 2" Ball                            | 2 " Ball                           |

Specifications and designs are subject to change.

# Specifications

## Standard

|                                      | MMG75D                             | MMG100D                            | MMG130D                            | MMG175                             |
|--------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| <b>Output</b>                        |                                    |                                    |                                    |                                    |
| 3 Phase - Standby (kW/kVA)           | 69 / 86                            | 86 / 107                           | 107 / 134                          | 153 / 191                          |
| Amps (480/208 V)                     | 103 / 239                          | 129 / 297                          | 161 / 372                          | 230 / 530                          |
| 3 Phase - Prime (kW/kVA)             | 62 / 77                            | 78 / 98                            | 98 / 122                           | 138 / 172                          |
| Amps (480/208 V)                     | 93 / 214                           | 118 / 272                          | 147 / 339                          | 207 / 477                          |
| 1 Phase - Standby (kW/kVA)           | 60 / 60                            | 75 / 75                            | 96 / 96                            | 125 / 125                          |
| Amps (240V)                          | 250                                | 313                                | 400                                | 521                                |
| 1 Phase - Prime (kW/kVA)             | 56 / 56                            | 71 / 71                            | 90 / 90                            | 120 / 120                          |
| Amps                                 | 233                                | 296                                | 375                                | 500                                |
| AC Voltage 1-phase                   | 120, 139, 208, 220, 240, 277       |                                    | 120, 139, 208, 220, 240            |                                    |
| AC Voltage 3-phase                   | 208, 220, 440, 480                 |                                    | 277, 208, 220, 440, 480            |                                    |
| Frequency Hz                         | 60                                 |                                    | 60                                 |                                    |
| Power Factor                         | 1 (1Ø), 0.8 (3Ø)                   |                                    | 1 (1Ø), 0.8 (3Ø)                   |                                    |
| Generator (Brand/Type/Insulation)    | Marathon/Brushless/H               |                                    | Marathon/Brushless/H               |                                    |
| Sound (dB(A) 23 Feet @ prime)        | 68                                 | 68                                 | 68                                 | 68                                 |
| CSA Listed                           | Yes                                | Pending                            | Pending                            | Yes                                |
| <b>Size and Weight</b>               |                                    |                                    |                                    |                                    |
| Skid Mounted ( l x w x h ) in (m)    | 119 x 40 x 62 (3.02 x 1.02 x 2.03) | 119 x 40 x 62 (3.02 x 1.02 x 2.03) | 144 x 50 x 77 (3.66 x 1.27 x 1.96) | 144 x 50 x 77 (3.66 x 1.27 x 1.96) |
| Dry Weight lb (kg)                   | 3530 (1600)                        | 3780 (1714)                        | 5444 (2469)                        | 6604 (2996)                        |
| Operating Weight lb (kg)             | 4700 (2131)                        | 4740 (2150)                        | 7929 (3596)                        | 9032 (4097)                        |
| Trailer Mounted ( l x w x h ) in (m) | 170 x 69 x 80 (4.32 x 1.75 x 2.03) | 170 x 69 x 80 (4.32 x 1.75 x 2.03) | 210 x 86 x 93 (5.33 x 2.18 x 2.29) | 210 x 86 x 93 (5.33 x 2.18 x 2.36) |
| Dry Weight lb (kg)                   | 4240 (1923)                        | 4480 (2032)                        | 6840 (3102)                        | 8000 (3629)                        |
| Operating Weight lb (kg)             | 5410 (2454)                        | 5440 (2468)                        | 9325 (4230)                        | 10428 (4730)                       |
| <b>Engine</b>                        |                                    |                                    |                                    |                                    |
| Interim Tier                         | Interim Tier 4                     | Interim Tier 4                     | Tier 4                             | Interim Tier 4                     |
| Brand                                | John Deere                         | John Deere                         | John Deere                         | John Deere                         |
| Model #                              | PE4045HFG92                        | PE4045HFG92                        | PE4045HFG93                        | PE6068HFG94                        |
| Aspiration                           | Turbo                              | Turbo                              | Turbo                              | Turbo                              |
| HP (prime @ 1800rpm) (kW)            | 97 (72)                            | 121 (90)                           | 152 (113)                          | 217 (162)                          |
| Displacement in3 (L)                 | 274 (4.5)                          | 275 (4.5)                          | 275 (4.5)                          | 415 (6.8)                          |
| Cylinders                            | 4                                  | 4                                  | 4                                  | 6                                  |
| Speed (rpm)                          | 1800                               | 1800                               | 1800                               | 1800                               |
| Fuel Consumed prime gph (Lph)        | 4.78 (18.1)                        | 6.2 (23.5)                         | 7.4 (28.0)                         | 10.9 (41.3)                        |
| Battery (12 volt)                    | 1 - 12V/720 CCA                    | 1 - 12V/720 CCA                    | 1-12V/1000 CCA                     | 1-12V/1000 CCA                     |
| <b>Capacities</b>                    |                                    |                                    |                                    |                                    |
| Fuel Tank gal (L)                    | 165 (625)                          | 165 (625)                          | 342 (1295)                         | 342 (1295)                         |
| Approximate Run Time hrs             | 31                                 | 24                                 | 44                                 | 29                                 |
| <b>AC Distribution</b>               |                                    |                                    |                                    |                                    |
| Main Breaker                         | 300                                | 400                                | 450                                | 700                                |
| Voltage Selection                    | Link/Reconnect Board               | Link/Reconnect Board               | Link/Reconnect Board               | 3 Position Switch (lockable)       |
| Voltage Regulation                   | +/- 0.5%                           | +/- 0.5%                           | +/- 0.5%                           | +/- 0.5%                           |
| 120V - 20 amp GFCI Duplex            | 2                                  | 2                                  | 2                                  | 2                                  |
| 240V - 30 amp Twist Lock             | N/A                                | N/A                                | N/A                                | NA                                 |
| 240V - 50 amp Twist Lock             | 3                                  | 3                                  | 3                                  | 3                                  |
| <b>Trailer</b>                       |                                    |                                    |                                    |                                    |
| # of Axles & Capacity lbs (kg)       | 1 - 6000 (2722)                    | 1 - 6000 (2722)                    | 1-6000 (2722)                      | 2 - 6000 (2722)                    |
| Tire Size (in)                       | 15                                 | 15                                 | 16                                 | 16                                 |
| Brakes                               | Surge                              | Surge                              | Surge                              | Surge                              |
| Hitch – Standard                     | 3" Ring                            | 3" Ring                            | 3" Ring                            | 3" Ring                            |

Specifications and designs are subject to change. Limited quantities on some models.

## Standard

|                                      | MMG205                             | MMG330                               | MMG480                               | MMG625                             |
|--------------------------------------|------------------------------------|--------------------------------------|--------------------------------------|------------------------------------|
| <b>Output</b>                        |                                    |                                      |                                      |                                    |
| 3 Phase - Standby (kW/kVA)           | 174 / 217                          | 290 / 363                            | 419 / 524                            | 550 / 688                          |
| Amps (480/208 V)                     | 261 / 602                          | 437 / 1008                           | 630 / 1454                           | 828(1910)                          |
| 3 Phase - Prime (kW/kVA)             | 164 / 205                          | 263 / 329                            | 379 / 474                            | 757 (1746)                         |
| Amps (480/208 V)                     | 247 / 569                          | 396 / 913                            | 570 / 1316                           | N/A                                |
| 1 Phase - Standby (kW/kVA)           | 155 / 155                          | N/A                                  | N/A                                  | N/A                                |
| Amps (240V)                          | 646                                | N/A                                  | N/A                                  | N/A                                |
| 1 Phase - Prime (kW/kVA)             | 142 / 142                          | N/A                                  | N/A                                  | N/A                                |
| Amps                                 | 592                                | N/A                                  | N/A                                  | N/A                                |
| AC Voltage 1-phase                   | 120, 139, 208, 220, 240            | N/A                                  | N/A                                  | N/A                                |
| AC Voltage 3-phase                   | 277, 208, 220, 440, 480            | 208, 480                             | 208, 480                             | 480                                |
| Frequency Hz                         | 60                                 | 60                                   | 60                                   | 60                                 |
| Power Factor                         | 0.8 (3Ø)                           | 1 (0.8 (3Ø))                         | 0.8 (3Ø)                             | 1 (1Ø), 0.8 (3Ø)                   |
| Generator (Brand/Type/Insulation)    | Marathon/Brushless/H               | Marathon/Brushless/H                 | Marathon/Brushless/H                 | Marathon/Brushless/H               |
| Sound (dB(A) 23 Feet @ prime)        | 68                                 | 68                                   | 68                                   | 72                                 |
| CSA Listed                           | Yes                                | Pending                              | No                                   | Yes                                |
| <b>Size and Weight</b>               |                                    |                                      |                                      |                                    |
| Skid Mounted ( l x w x h ) in (m)    | 144 x 50 x 77 (3.66 x 1.27 x 1.96) | 171 x 60 x 90 (4.34 x 1.52 x 2.87)   | 175 x 60 x 96 (6.35 x 2.59 x 2.95)   | 212 x 75 x 107 (5.4 x 1.9 x 2.7)   |
| Dry Weight lb (kg)                   | 6624 (3005)                        | 9447 (4285)                          | TBD                                  | 17240 (7820 )                      |
| Operating Weight lb (kg)             | 9052 (4106)                        | 12907 (5854)                         | TBD                                  | 22000 (9979)                       |
| Trailer Mounted ( l x w x h ) in (m) | 210 x 86 x 93 (5.33 x 2.18 x 2.36) | 230 x 102 x 110 (5.84 x 2.59 x 2.79) | 250 x 102 x 116 (6.35 x 2.59 x 2.95) | 253 x 102 x 130 (6.4 x 2.59 x 3.3) |
| Dry Weight lb (kg)                   | 8020 (3638)                        | 12320 (5588)                         | TBD                                  | 17240 (7820)                       |
| Operating Weight lb (kg)             | 10448 (4739)                       | 15780 (7158)                         | TBD                                  | 22000 (9979)                       |
| <b>Engine</b>                        |                                    |                                      |                                      |                                    |
| Interim Tier                         | Interim Tier 4                     | Interim Tier 4                       | Interim Tier 4                       | Flex Tier 2                        |
| Brand                                | John Deere                         | John Deere                           | John Deere                           | Volvo                              |
| Model #                              | PE6068HFG95                        | PE6090HFG95                          | RG6135HFG95                          | TAD1642GE                          |
| Aspiration                           | Turbo                              | Turbo                                | Turbo                                | Turbo                              |
| HP (prime @ 1800rpm) (kW)            | 252 (188)                          | 396 (295)                            | 571 (426)                            | 724 (TBA)                          |
| Displacement in3 (L)                 | 415 (6.8)                          | 549 (9.0)                            | 824 (13.5)                           | TBA (16)                           |
| Cylinders                            | 6                                  | 6                                    | 6                                    | 6                                  |
| Speed (rpm)                          | 1800                               | 1800                                 | 1800                                 | 1800                               |
| Fuel Consumed prime gph (Lph)        | 12.8 (48.5)                        | 18.7 (70.8)                          | 28.4 (107.6)                         | 34.6 (131)                         |
| Battery (12 volt)                    | 1-12V/1000 CCA                     | 2-12V/1000 CCA                       | 2-12V/1000 CCA                       | 2-12V/950 CCA                      |
| <b>Capacities</b>                    |                                    |                                      |                                      |                                    |
| Fuel Tank gal (L)                    | 342 (1295)                         | 459 (1738)                           | 616 (2332)                           | 653 (2472)                         |
| Approximate Run Time hrs             | 24                                 | 23                                   | 20                                   | 18                                 |
| <b>AC Distribution</b>               |                                    |                                      |                                      |                                    |
| Main Breaker                         | 800                                | 1200                                 | 1600                                 | 225                                |
| Voltage Selection                    | 3 Position Switch (lockable)       | Link/Reconnect Board                 | Link/Reconnect Board                 | Link/Reconnect Board               |
| Voltage Regulation                   | +/- 0.5%                           | +/- 0.5%                             | +/- 0.5%                             | +/- 0.5%                           |
| 120V - 20 amp GFCI Duplex            | 2                                  | 2                                    | 2                                    | 2                                  |
| 240V - 30 amp Twist Lock             | N/A                                | N/A                                  | N/A                                  | N/A                                |
| 240V - 50 amp Twist Lock             | 3                                  | 3                                    | 3                                    | 3                                  |
| <b>Trailer</b>                       |                                    |                                      |                                      |                                    |
| # of Axles & Capacity lbs (kg)       | 2 - 6000 (2722)                    | 2 - 8000 (3629)                      | 3 - 8000 (3629)                      | 3 - 8000 (3629)                    |
| Tire Size (in)                       | 16                                 | 17.5                                 | 17.5                                 | 17.5                               |
| Brakes                               | Surge                              | Electric                             | Electric                             | Electric                           |
| Hitch – Standard                     | 3" Ring                            | 3" Ring                              | 3" Ring                              | 3" Ring                            |

Specifications and designs are subject to change. Limited quantities on some models.





.....

For more information,  
visit us online at  
[www.generacmobileproducts.com](http://www.generacmobileproducts.com)

.....



**Assembled & Built  
in the USA**

**GENERAC<sup>®</sup>**



**MAGNUM**