




i-Vu® Building Automation System Rectangular Zone Damper with VVT Zone Controller



The VVT rectangular zone damper with VVT Zone controller is a component of Carrier's i-Vu Building Automation System. It provides accurate and precise airflow for VVT applications. The factory-integrated VVT Zone controller maintains space temperature by modulating the proper amount of supply airflow through its damper.



| Part Number | Duct Size (inches) | Weight (lbs) | CFM Airflow Range | |
|-------------|--------------------|--------------|-------------------|------|
| | | | Min | Max |
| OPND8X10ZC | 8 x 10 | 10.0 | 410 | 610 |
| OPND8X14ZC | 8 x 14 | 11.5 | 560 | 825 |
| OPND8X18ZC | 8 x 18 | 13.0 | 725 | 1075 |
| OPND8X24ZC | 8 x 24 | 16.0 | 925 | 1175 |

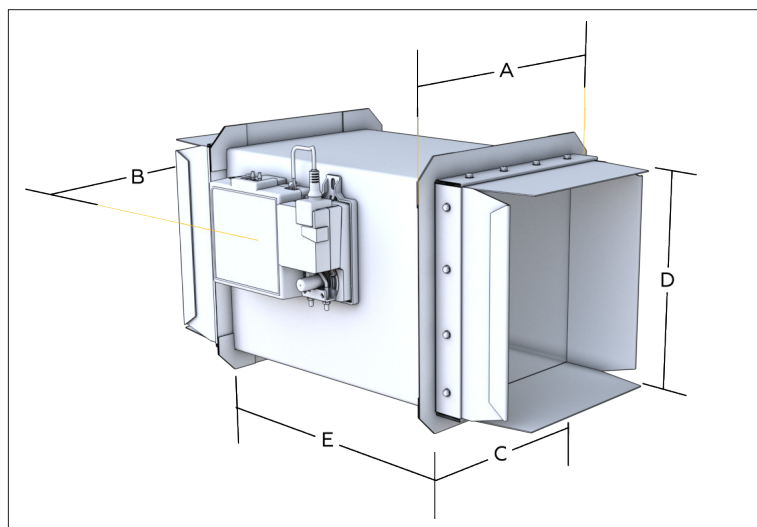

Dimensions (inches)

| Part Number | A | B | C | D | E |
|-------------|-------|----|---|----|------|
| OPND8X10ZC | 10.25 | 13 | 8 | 10 | 13.5 |
| OPND8X14ZC | 10.25 | 17 | 8 | 14 | 13.5 |
| OPND8X18ZC | 10.25 | 21 | 8 | 18 | 13.5 |
| OPND8X24ZC | 10.25 | 27 | 8 | 24 | 13.5 |

i-Vu® Building Automation System

Rectangular Zone Damper with VVT Zone Controller



VVT Zone Damper

| | |
|------------------------------|---|
| Physical | Duct Housing: 24 Ga.; Damper Blade: 20 Ga. Duct Connection: Standard "S" Lock & Drive Cleats |
| Features | <ul style="list-style-type: none"> • Integral supply air temperature sensor • Demand control ventilation (DCV) sensor input point • Counterclockwise and clockwise damper rotation • Configurable minimum and maximum open damper positions • Optional 0-10V DC output for linking actuators |
| Operating Performance | Torque rating: 45 in. lb.; Degree of rotation: 45, 60, or 90 degrees; Pressure rating: 1 in. wg static pressure |

VVT Zone Controller

| | |
|--------------------------------------|---|
| Features | <ul style="list-style-type: none"> • Integral actuator with brushless DC motor, rated at 45 inch-pounds (4Nm) torque, runtime is 205 seconds for 90 degree travel during control • Provides pressure dependent (VVT), space temperature control for terminals up to 2.7 sq. ft. inlet • Provides zone level humidity control OR zone level demand control ventilation (ASHRAE 62), with field-installed sensor • Provides PID control • Optional terminal fan or auxiliary heat control • Provides remote occupancy contact input for field-installed occupancy sensor • Supports sensor averaging • Capable of stand-alone operation with integral supply air temperature sensor • Air balancing tool available |
| Communications | <ul style="list-style-type: none"> • BACnet MS/TP at 9600 bps, 19.2 kbps, 38.4 kbps, or 76.8 kbps or ARCNET 156 kbps • i-Vu can be used to access controller both locally and remotely. |
| Power Requirements | 24VAC ± 10%, 50-60Hz, 14 VA power consumption, 26VDC (25V min, 30V max), Single Class 2 source only, 100 VA or less |
| Environmental Operating Range | 0 to 140°F (-18 to 54°C) 10 to 90% RH, non-condensing |
| Storage Temperature | -24 to 140°F (-30 to 60°C) 10 to 90% RH, non-condensing |
| Wiring | Power: 2 conductor, 18 AWG, unshielded Comm: 22/24 AWG, single twisted shld pair, low cap, CL2P wire |
| Listed By | United States: FCC compliant to Title CFR47, Part 15, Subpart B, Class A; UL Listed, File E143900; CCN PAZX, UL 916, Energy Management Equipment; ANZ: RCM Mark AS/NZS 61000-6-3; Canada: UL Listed File E143900, CCN PAZX7, CAN/CSA C22.2 No. 205 Signal Equip., Industry Canada Compliant ICES-003, Class A; CE Mark Compliant with 2014/30/EU, and RoHS Compliant: 2015/863/EU; UKCA Mark compliant with Electromagnetic Compatibility Regulations 2016 – Gov.UK and RoHS for Electrical and Electronic Equipment 2012 |

