

## RS7000E

### RS SERIES Commercial/Residential Portable Generators

### Features

- **PowerDial™** integrates the start, run and stop functions into one simple-to-use dial, conveniently located for quicker startup and shut-down, eliminating the search for separate controls in an emergency
- **Generac's 420cc OHV engine** with splash lubrication provides a long engine life
- **Single touch electric start**, battery included, provides hassle-free start-up.
- **Low-oil shutdown** automatically safeguards engine from damage
- **Covered outlets** provide added protection from the environment and rugged working conditions
- **Hour Meter** tracks maintenance intervals.
- **Plug-in battery charger jack** keeps battery charged and ready to go.
- **1-1/4 inch hardened steel tube cradle** for added durability and strength
- **Fold-down, locking handle** for sturdy portability and compact storage.
- **Large-capacity fuel tank** with incorporated fuel gauge provides durability and extended run times
- **Heavy-duty, never-flat wheels** for reliable portability


Model 6673-0 UPC: 696471066739 (49ST)

Model 6675-0 UPC: 696471066753 (49ST/Canada)



**AC Rated Output Running Watts 7000**  
**AC Maximum Output Starting Watts 8750**

### 49-State Control Panel

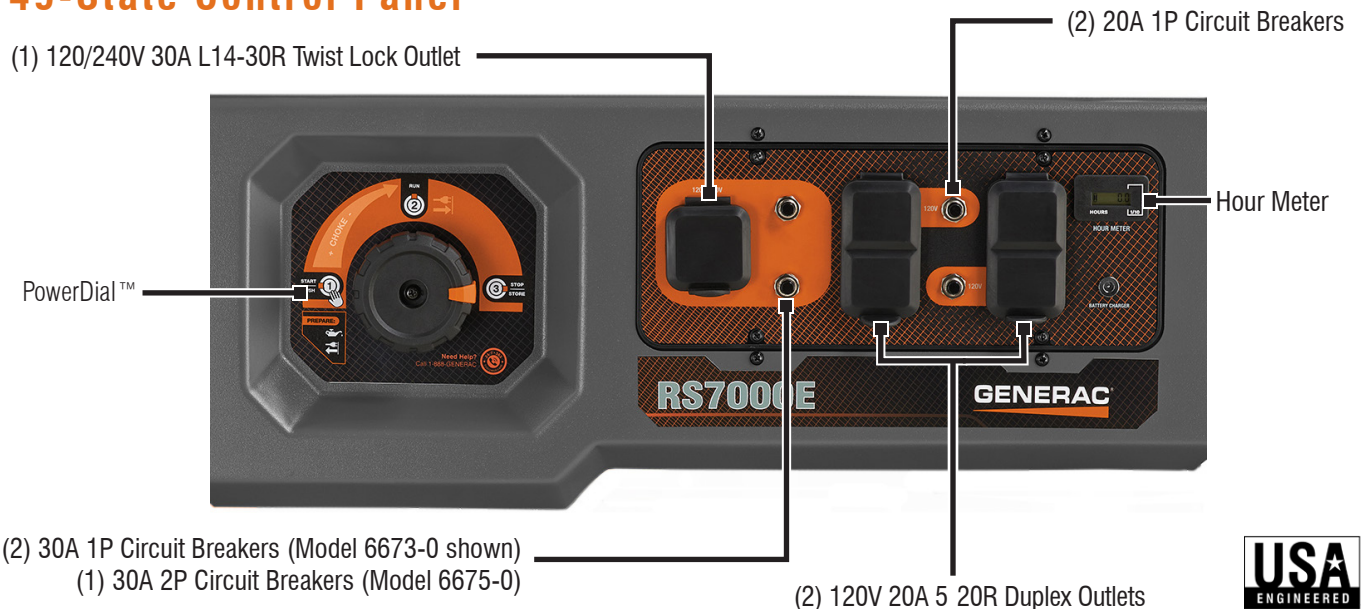

# RS7000E


## specifications

Product Series	RS7000E
Model (Configuration)	6673-0 (EPA) 6675-0 (CSA)
AC Rated Output Running Watts:	7000
AC Maximum Output Motor Starting Watts:	8750
AC Voltage	120/240 VAC
AC Frequency	60 Hz
Rated VAC Amperage	58.4/29.2
Engine Displacement	420cc
Engine Type	OHV
Engine RPM	3600
Recommended Oil	10W-30 / SAE30
Lubrication Method	Splash
Automatic Voltage Regulation (AVR)	Yes
Choke Location	PowerDial™
Fuel Shut Off	PowerDial™
Starting Method	Electric/Recoil Pull Start
Low Oil Shutdown Method	Low Level
Battery Type	12 VDC, 10 AH
Battery Charger Input Jack	Included
Neutral Bonded to Ground	Yes

Start Switch Type	PowerDial™
Switch Location	PowerDial™
Fuel Gauge	Built-In Tank
Fuel Tank Capacity Gal (Ltr)	7.5 (28.4)
Run Time at 50% (Hours)	12
Handle Style	Single Folding / Locking
Wheel Type	9.5" Solid Wheels
Maintenance Kit	Sold Separately
Warranty - Residential	2 Year Ltd
Warranty - Commercial	1 Year Ltd

## Dimensions and Weights

	Models 6673-0 / 6675-0
Length in (mm)	30 (762)
Width in (mm)	27 (685.8)
Height in (mm)	25.75 (654)
Extended Length in (mm)	44.5 (1130.3)
Carton Length in (mm)	31.1 (790)
Carton Width in (mm)	21.85 (555)
Carton Height in (mm)	24 (610)
Unit Weight lbs (kg)	192.2 (87.2)
Shipping Weight lbs (kg)	215.8 (97.9)

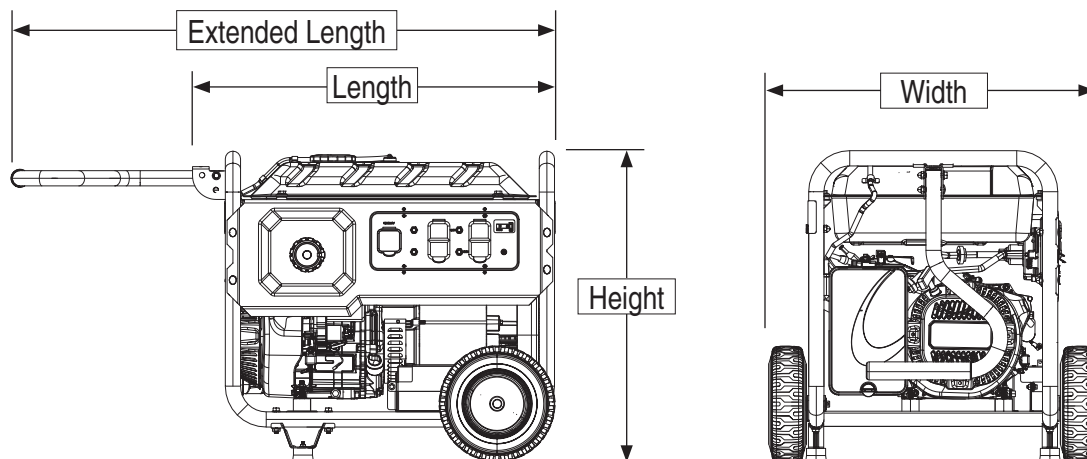

**GENERAC®**

Generac Power Systems, Inc. • P.O. Box 8, Waukesha, WI 53187 • generac.com

©2014 Generac Power Systems, Inc. All rights reserved. All specifications are subject to change without notice. Bulletin OK8513-B / Printed in U.S.A. 05/09/14